

K17208 LIFT & CONVEYOR



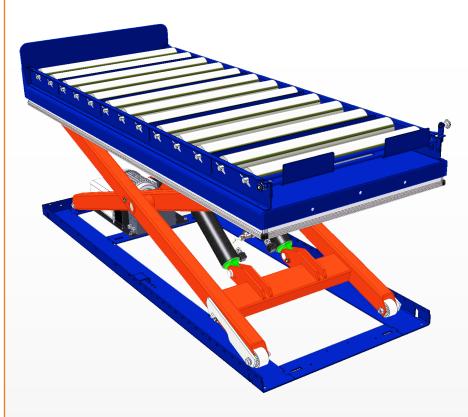



LIFT & CONVEYOR - 1T - 2,0x0,8m - 1,3m - 0,3m

Developed and manufactured for the production line, this lift tabel equipped with a roller conveyor is driven by a PLC (EdmoLift UC60 electrics) that operates the sequence in dead man's control. Positioning is given by the upper and lower limit switch.

The roller conveyor is designed with a fixed end stop and a manual stop in the beginning of the conveyor. A limit switch on the manual stop only allows up / down movement when the stop is activated.

The lift tabe is equipped with an integrated power pack.

The PLC offers a guidance during fault tracing by connection a service control unit with buzzer functionality. The buzzer indicates the problem by giving different sequences, easy to translate and circle the problem.

By investing into this lift and conveyor with a capacity of 1000 kg, equipped with a 2,0x0.8m platform, you'll benefit from a lifting stroke of 1,3m and a closed height of 0,3m.

Feel free to contact us for further information about potential modification that would suit the specifications of your project.

K17208 TA 1000 LIFT & CONVEYOR CARACTERISTICS

Capacity: kg	Length platform mm	Width platform mm	Lifting stroke mm	Closed height mm	Hydraulic power pack	Lifting time sec	Voltage VAC	Power kW	Ctrl voltage VDC	IP	Certificate
1000	2000	800	1300	298	Integrated	16	3-380	1,5	24	54	CE, Machine directive & EMC

Security feautures: Safety frame on the platform stops downwards movement when being affected. To "re-set", push up button to lift the platform. Manual stop in beginning of conveyor.

EdmoLift Solutions SPRL 40, boîte 1, devant l'Aîte 4031 – Liège BELGIUM Telephone: +33 1 82 88 93 70 / +32 2 808 43 58 Cell.: +33 6 29 81 13 35 Fax: +33 1 82 88 93 71 / +32 2 808 43 59

Org. no.: BEO 897 714 412 E-mail: jerome.laermans@edmolift.se



TA 1000